



Specification

P/N	19inch 33kW BBU shelf
Dimension (W x D x H)	87.55 x 438 x 764.5 mm
Output Power	49VDC/112.25A
Input Voltage	50Vdc
Temperature	Operational: 0°C to +40°C Long term standby mode ambient is +15°C to +35°C Non-operational: -20°C to +60°C
Altitude	Operational: 0-3000m Non-operational: 0-12000m
Communications	ModBus/PMBus
BBU Life	6 Years (5500W discharge time >90s at the end of 6 years)

19inch 33kW BBU Shelf

Key Features

- Provide an efficient backup solution when utility outage
- Battery pack capacity by routine SOH (State of health) test
- PCM (Periodical charge mode) keep long time to be periodically re-charged

Applications



HPC



AI




Deep Learning Training



Data Analytics

Dimension Details

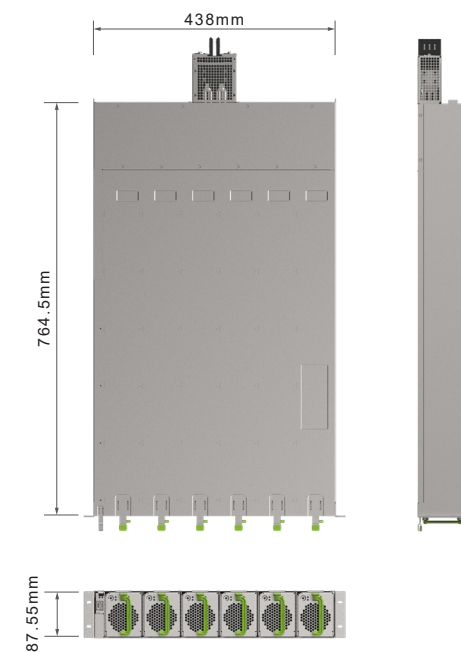

For more product information and sales inquiries :

-  www.liteon.com
-  +886-2-8798-2888
-  CIPS-Sales@liteon.com
-  13F, No. 555, Siyuan Rd., Xinzhuang Dist., New Taipei City 242034, Taiwan, R.O.C.



Visit us

Specifications are subject to change without notice.