




# ORV3 PMC

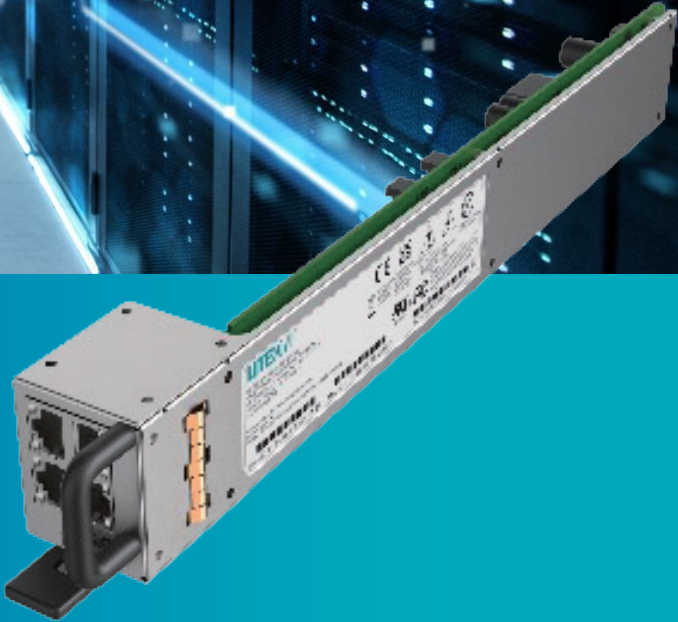

## Key Features

- ORV3 compliance (OU shelf)
- RJ45 Ethernet port
- Power shelf remote monitoring for PSU/BBU/SCS
- Power shelf remote management and event logs
- Remote Firmware update supported

## Benefits

- Hot-pluggable for easy installation and maintenance
- Secure boot supported
- POE capability
- Multiple RS485 channels with daisy chain supported

## Applications




Power shelf controller

## Specification

|  |   |
|--|---|
| Form Factor and Dimensions (W x D x H) | 48 x 350 x 39.7 (mm)  |
| Input Port                             | 4XRJ45<br>2 for Ethernet (POE capability)<br>1 for RS485<br>1 for PSU signals |
| Ethernet Port                          | Supports 10/100/1000M, IPV4/IPV6, SNMPv3 and TCP/IP                           |
| Microprocessor                         | ARM Cortex A7   |
| Memory                                 | 1GB DDR4 SDRAM<br>2X128MB NOR Flash<br>4GB EMMC NAND Flash                    |
| Communications                         | I2C/PMBUS<br>RS485/MODBUS   |
| Others                                 | Redfish Compliant   |

## Dimension Details

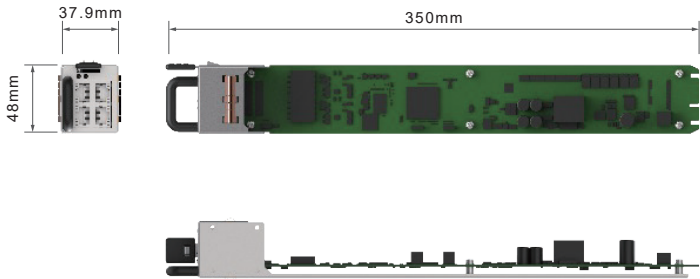

For more product information and sales inquiries :

- [www.liteon.com](http://www.liteon.com)
- +886-2-8798-2888
- [CIPS-Sales@liteon.com](mailto:CIPS-Sales@liteon.com)
- 13F, No. 555, Siyuan Rd., Xinzhuang Dist., New Taipei City 242034, Taiwan, R.O.C.



Visit us

Specifications are subject to change without notice.