



Specification PS-2302-9L

Form Factor and Dimensions (W x D x H)	54.5 x 321.5 x 40 (mm)
Output Power	3000W
Output Voltage	12V
Output Voltage Rating (Standby)	3.3V
Input Voltage	90-264VAC, 192-300VDC
Power Factor	0.90 @10% - 20% Load 0.98 @20% - 100% Load
iTHD	10% @10% - 50% Load 5% @50% - 100% Load
Efficiency	80 PLUS® Titanium (>96.5%)
Current Sharing Method	Active
Communications	PMBus

Slim
3000W



Key Features

- Titanium Efficiency (>96.5%)
- Bootloader Live Update
- Secure boot supported
- ITIC compliance
- HVAC/HVDC supported
- PMBus communication

Benefits

- Modular Design
- Slim Form Factor
- Power Saving Feature
- Series Model with Different Rated Power

Applications




Server



Networking

Dimension Details

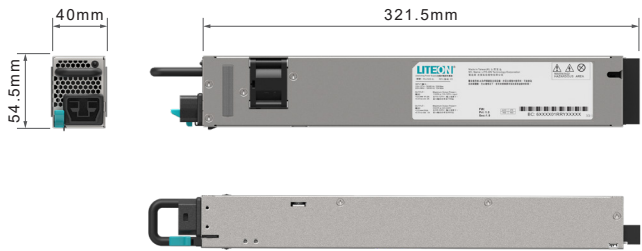

For more product information and sales inquiries :

- www.liteon.com
- +886-2-8798-2888
- CIPS-Sales@liteon.com
- 13F, No. 555, Siyuan Rd., Xinzhuang Dist., New Taipei City 242034, Taiwan, R.O.C.



Visit us

Specifications are subject to change without notice.