


Specification PF-1333-2C1U

Form Factor and Dimensions (W x D x H)	537 x 788.7 x 46 (mm)
Power	33,000W
Output Voltage/Current	49Vdc/673.5A
Input Voltage Range	3Φ 200~277Vac (3W+N+PE) Dual AC Whip
Operating Temperature	-5°C ~ + 45°C
Humidity	10-90% RH non-condensing
Cooling	By PSU fan air flow
Communications	MODBUS
Safety Standards	UL 62368-1, IEC 62368-1 and EN 62368-1

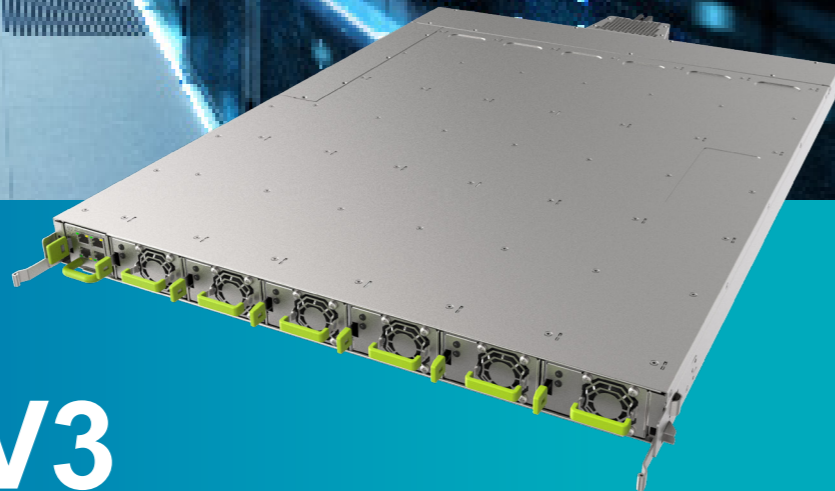

33kW ORV3 Power Shelf 48V

Key Features

- EIA 21" Rack Compatible
- PMM for shelf monitoring or remote control
- AC Input Range: 3Φ 200~277Vac
- Output Voltage: 50V
- Maximum Output Power: 33kW (673.5A Max.)

Applications



HPC



AI




Deep Learning



Data Analytics

Dimension Details

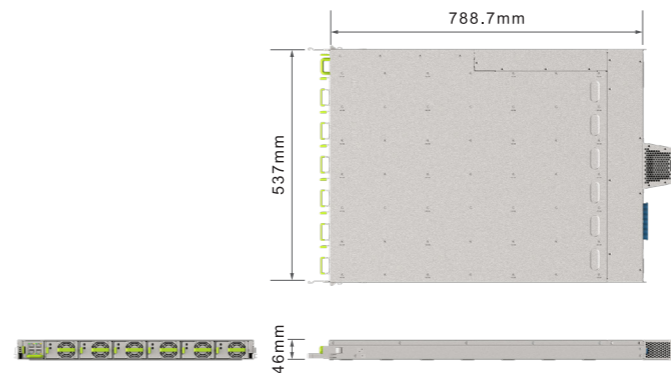

For more product information and sales inquiries :

- www.liteon.com
- +886-2-8798-2888
- CIPS-Sales@liteon.com
- 13F, No. 555, Siyuan Rd., Xinzhuang Dist., New Taipei City 242034, Taiwan, R.O.C.



Visit us

Specifications are subject to change without notice.