

Specification PS-2202-6L

Form Factor and Dimensions (W x D x H)	54.5 x 321.5 x 40 (mm)
Power	2000W/1000W
Output Voltage Rating	12V
Output Voltage Rating (Standby)	3.3V
Input Voltage	90-264VAC, 192-300VDC
Power Factor	0.90 @10% ≤ Load < 20% 0.98 @20% ≤ Load < 100%
iTHD	10% @10% ≤ Load < 20% 10% @20% ≤ Load < 50% 5% @50% ≤ Load ≤ 100%
Efficiency	80 PLUS® Titanium
Current Sharing Method	Active
Communications	PMBus



Slim 2000W

Key Features

- Titanium efficiency
- Bootloader firmware update
- ITIC compliance
- PMBus communication

Benefits

- Modular design
- Slim form factor
- Power saving feature
- Series model with different rated power

Applications




Server



Networking

Dimension Details

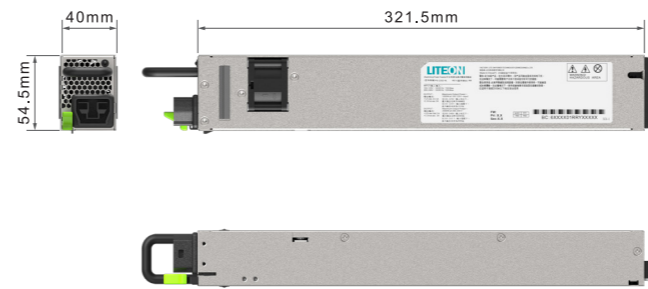

For more product information and sales inquiries :

- www.liteon.com
- +886-2-8798-2888
- CIPS-Sales@liteon.com
- 13F, No. 555, Siyuan Rd., Xinzhuang Dist.,
New Taipei City 242034, Taiwan, R.O.C.



Visit us

Specifications are subject to change without notice.